

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** COLORS

**Supplier's address:** Jet Osijek d.o.o., Vinkovačka cesta 68 Osijek (31000) Hrvatska, EU

**Model identifier:** TLS-MT20NK251000-129030FF-NBW

## Type of light source:

|                                                     |             |                                 |     |
|-----------------------------------------------------|-------------|---------------------------------|-----|
| Lighting technology used:                           | LED         | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Direct Wire |                                 |     |
| Mains or non-mains:                                 | MLS         | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No          | Envelope:                       | -   |
| High luminance light source:                        | No          |                                 |     |
| Anti-glare shield:                                  | No          | Dimmable:                       | No  |


## Product parameters

| Parameter                                                                                                                                      | Value                | Parameter                                                                                                                                                  | Value                                                                   |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>General product parameters:</b>                                                                                                             |                      |                                                                                                                                                            |                                                                         |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 12                   | Energy efficiency class                                                                                                                                    | G                                                                       |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 758 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000                                                                   |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 12,0                 | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                                                                    |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 90                                                                      |
| Outer dimensions without separate control gear, lighting control                                                                               | Height               | 1 000                                                                                                                                                      | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|                                                                                                                                                | Width                | 25                                                                                                                                                         |                                                                         |
|                                                                                                                                                | Depth                | 25                                                                                                                                                         |                                                                         |
|                                                                                                                                                |                      |                                                                                                                                                            | See image in last page                                                  |


|                                                                                                                         |      |                                                                    |                |
|-------------------------------------------------------------------------------------------------------------------------|------|--------------------------------------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                                                    |                |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)                                       | -              |
|                                                                                                                         |      | Chromaticity coordinates (x and y)                                 | 0,420<br>0,395 |
| <b>Parameters for directional light sources:</b>                                                                        |      |                                                                    |                |
| Peak luminous intensity (cd)                                                                                            | 910  | Beam angle in degrees, or the range of beam angles that can be set | 180            |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                                                    |                |
| R9 colour rendering index value                                                                                         | 80   | Survival factor                                                    | 0,90           |
| the lumen maintenance factor                                                                                            | 0,98 |                                                                    |                |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                                                    |                |
| displacement factor (cos $\phi_1$ )                                                                                     | 1,00 | Colour consistency in McAdam ellipses                              | 6              |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)                                  | -              |
| Flicker metric (Pst LM)                                                                                                 | 1,0  | Stroboscopic effect metric (SVM)                                   | 0,4            |

(a) '-': not applicable;

(b) '-': not applicable;

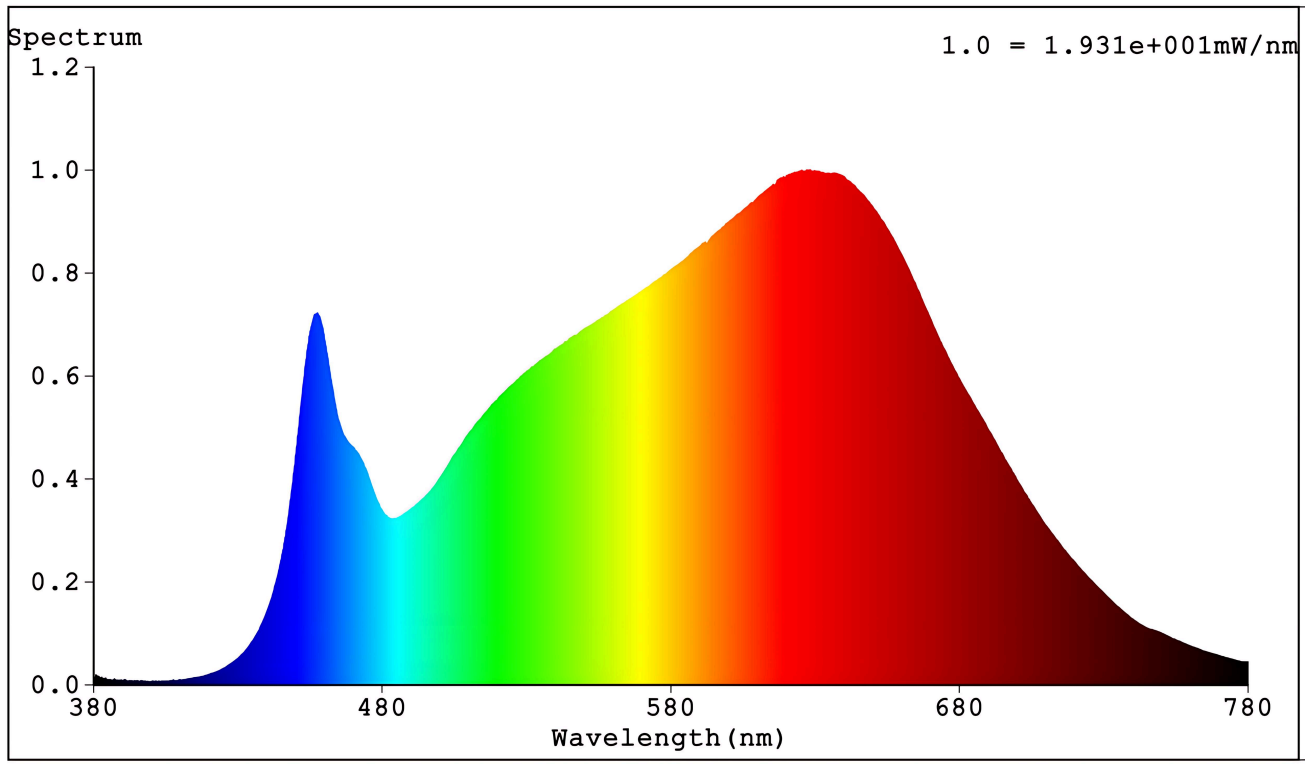

Model placed on the Union market from 01/08/2024



**EPREL registration number:** 2116557

<https://eprel.ec.europa.eu/qr/2116557>

**Supplier:** Jet Osijek d.o.o. (Importer)

**Website:** <http://www.jet.hr/>

**Customer care service:**

**Name:** Jet Osijek d.o.o.

**Website:** <http://www.jetos.hr>

**Email:** [roso@jet.hr](mailto:roso@jet.hr)

**Phone:** 0038598547311

**Address:**

Vinkovačka cesta 68 Osijek (31000) Hrvatska, EU